


**Circuit arrangement for driving LEDs especially in motor vehicle, has power component and LED arranged on common circuit board or common conducting film**

**Patent number:** DE10162404  
**Publication date:** 2003-07-03  
**Inventor:** KORTMOELLER MARTIN-JOHN (DE); SCHROEDER STEPHAN (DE)  
**Applicant:** HELLA KG HUECK & CO (DE)  
**Classification:**  
- international: H05K7/20; H05B37/02  
- european: H05B33/08D; H05K1/02B; H05K7/20F  
**Application number:** DE20011062404 20011219  
**Priority number(s):** DE20011062404 20011219

[Report a data error here](#)

**Abstract of DE10162404**

A circuit arrangement for operating/running at least one light emitting diode (LED) has at least one heat generating power component (3) and at least one LED (2), in which the heat generating power component (3) and the LED (2) are largely thermally decoupled. The power component (3) and the LED (2) are arranged on a common circuit board (1) or a common conducting film and thermal decoupling is realized by at least two heat sinks (4,5) mutually spaced from the circuit board (1) or the conducting foil.

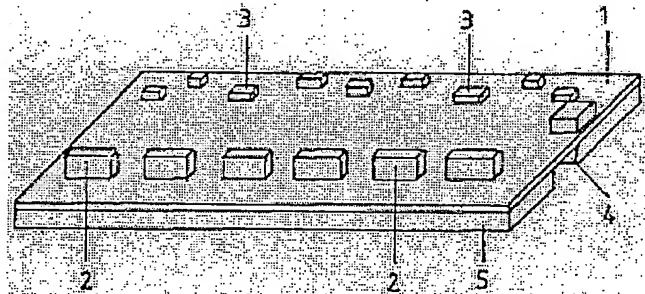

Data supplied from the [esp@cenet](mailto:esp@cenet) database - Worldwide